

Whirl-Wind Galvanized Box Fan

The Whirl-Wind galvanized box fan has performance, durability, and it is easy to install. This fan features a strong galvanized housing, and heavy duty 12-gauge welded wire mesh guards that are hot dip galvanized. Poly guard clips reduce noise and vibration between the housing and guard. Whirl-Wind fans include attached hanging brackets for quick and easy installation in your poultry, dairy, or commercial building. The high velocity air movement provides maximum air flow at a low electrical cost.

Features

- Available in 24", 36" and 50"
- 18 gauge galvanized housing
- 3, 4, or 6 blade balanced high output propeller
- **Lifetime Warranty** on 50" cast aluminum propellers
- Poly guard clips to reduce vibration for quiet performance
- Includes attached hanging brackets for easy installation
- 12 gauge wire mesh guards are hot dip galvanized after welding for long life
- 1" x 2" mesh guards standard on most models
- Belt drive models include a heavy duty spring belt tensioner to reduce bounce at startup, and provide self adjusting equal pressure throughout the life of the belt for high efficiency.
- Shaft bearings are eccentric locking, pre-lubricated, permanently sealed and rubber mounted for smooth operation and reduced blade fatigue, and are covered by a **3 Year Warranty**.
- Totally enclosed, maintenance-free, high-efficiency motors have completely sealed ball bearings, and are covered by a **2 Year Warranty**



Shown:
36" Direct Drive,
Galvanized 3 Blade

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.

Whirl-Wind




Attached hanging brackets for easy installation.



Poly guard clips to reduce vibration for quiet performance.



Heavy duty spring belt tensioner on belt drive models to reduce bounce at startup.

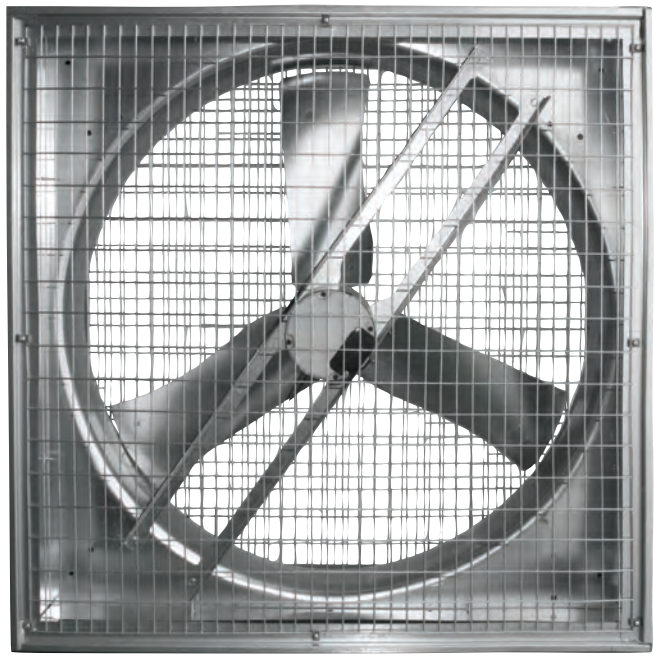

Shown:
Back of 36" Direct Drive, Galvanized 3 Blade Whirl-Wind


Part#	Size	Ph	Spd	Thrust CFM	Thrust CFM/ Watt	Drive	Prop	Mesh
Single Phase								
VG24DM	24"	1	1	5,000	13.7	Direct	3-Alm	1" x 2"
** VG36DM	36"	1	1	9,650	19.0	Direct	3-Glv	1" x 2"
VG36N	36"	1	1	9,720	18.6	Direct	2-Nyl	1" x 2"
VG36DM-22	36"	1	1	10,290	18.5	Direct	3-Glv	2" x 2"
VG36VF36GBM	36"	1	1	9,800	16.8	Belt	4-Glv	1" x 2"
VG36VF36	36"	1	1	13,540	10.5	Belt	4-Glv	1" x 2"
VG50DM	50"	1	1	17,000	18.2	Direct	3-Glv	1" x 2"
** VG50	50"	1	1	21,200	20.8	Belt	3-Glv	1" x 2"
VG502	50"	1	2(H) (L)	20,900 13,900	18.2 27.1	Belt	3-Glv	1" x 2"
VG50-24	50"	1	1	22,100	22.0	Belt	3-Glv	2" x 4"
VG50CA	50"	1	1	21,800	21.2	Belt	3-CA	1" x 2"
VG50G6	50"	1	1	21,000	20.4	Belt	6-Glv	1" x 2"
Three Phase								
VG24DM3CF	24"	3	1	5,220	12.2	Direct	3-Glv	1" x 2"
VG36DM3CF	36"	3	1	9,840	19.9	Direct	3-Glv	1" x 2"
VG36DM3F-22	36"	3	1	10,320	21.0	Direct	3-Glv	2" x 2"
VG36VF363-E	36"	3	1	10,030	18.3	Belt	4-Glv	1" x 2"
VG36VF363	36"	3	1	11,700	14.3	Belt	4-Glv	1" x 2"
** VG50DM3B	50"	3	1	17,400	19.2	Direct	3-Glv	1" x 2"
VG503	50"	3	1	21,500	20.3	Belt	3-Glv	1" x 2"
VG503CA	50"	3	1	21,700	20.5	Belt	3-CA	1" x 2"
VG503G6	50"	3	1	22,100	18.5	Belt	6-Gal	1" x 2"

** Best sellers of 2018-19

Fan Size and Type	Dimensions (W x H x D) <i>(rounded to nearest 1/8")</i>
24" Direct Drive	30½" x 30½" x 16¼"
36" Direct Drive	40⅝" x 40⅝" x 14⅛"
36" Belt Drive	40½" x 40½" x 24¾"
50" Direct Drive	54½" x 54½" x 23¾"

Bold red text is data based on testing performed by an accredited lab using ANSI/AMCA Standard 230-12

OSHA requires this fan to be mounted a minimum of 7' above the floor

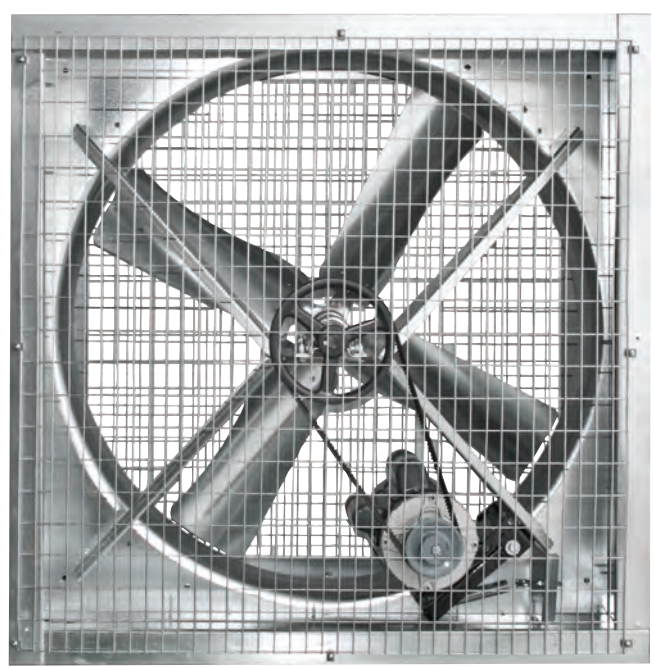

Shown:
Back of 36" Belt Drive, Galvanized 4 Blade Whirl-Wind

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.